
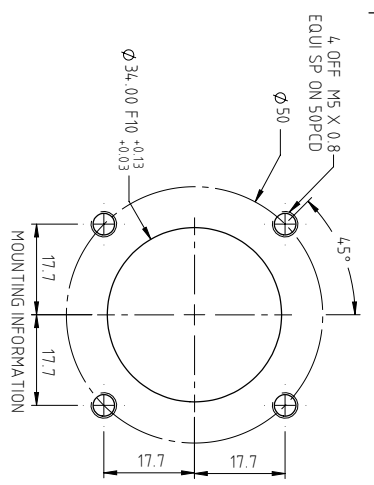



GAIN AND OFFSET ADJUSTMENTS
SEALED (CODE: Y)



ELECTRICAL OPTIONS / SPECIFICATIONS

| OUTPUT | SUPPLY (NOM.) | STANDARD |
|----------------------------|---------------|----------|
| A: 0.5 - 4.5V RATIO-METRIC | 5V | |
| B: 0.5V | 1.5V | |
| C: 0.5 - 9.5V | 24V | |
| D: 1.0V | 1.5V | |
| E: 0.5 - 4.5V | 24V | |
| F: 1.0V | 24V | |
| G: 1.0V | 24V | |
| H: 1.0V | 24V | |
| I: 1.0V | 24V | |
| J: 1.0V | 24V | |
| K: 1.0V | 24V | |
| L: 1.0V | 24V | |
| M: 1.0V | 24V | |
| N: 1.0V | 24V | |
| O: 1.0V | 24V | |
| P: 1.0V | 24V | |
| Q: 1.0V | 24V | |
| R: 1.0V | 24V | |
| S: 1.0V | 24V | |
| T: 1.0V | 24V | |
| U: 1.0V | 24V | |
| V: 1.0V | 24V | |
| W: 1.0V | 24V | |
| X: 1.0V | 24V | |
| Y: 1.0V | 24V | |
| Z: 1.0V | 24V | |

1 DRIVE 3000 MAXIMUM TO 0V

2 DRIVE 3000 MAXIMUM TO 0V

3 DRIVE 3000 MAXIMUM TO 0V

4 DRIVE 3000 MAXIMUM TO 0V

5 DRIVE 3000 MAXIMUM TO 0V

6 DRIVE 3000 MAXIMUM TO 0V

7 DRIVE 3000 MAXIMUM TO 0V

8 DRIVE 3000 MAXIMUM TO 0V

9 DRIVE 3000 MAXIMUM TO 0V

10 DRIVE 3000 MAXIMUM TO 0V

11 DRIVE 3000 MAXIMUM TO 0V

12 DRIVE 3000 MAXIMUM TO 0V

13 DRIVE 3000 MAXIMUM TO 0V

14 DRIVE 3000 MAXIMUM TO 0V

15 DRIVE 3000 MAXIMUM TO 0V

16 DRIVE 3000 MAXIMUM TO 0V

17 DRIVE 3000 MAXIMUM TO 0V

18 DRIVE 3000 MAXIMUM TO 0V

19 DRIVE 3000 MAXIMUM TO 0V

20 DRIVE 3000 MAXIMUM TO 0V

21 DRIVE 3000 MAXIMUM TO 0V

22 DRIVE 3000 MAXIMUM TO 0V

23 DRIVE 3000 MAXIMUM TO 0V

24 DRIVE 3000 MAXIMUM TO 0V

25 DRIVE 3000 MAXIMUM TO 0V

26 DRIVE 3000 MAXIMUM TO 0V

27 DRIVE 3000 MAXIMUM TO 0V

28 DRIVE 3000 MAXIMUM TO 0V

29 DRIVE 3000 MAXIMUM TO 0V

30 DRIVE 3000 MAXIMUM TO 0V

31 DRIVE 3000 MAXIMUM TO 0V

32 DRIVE 3000 MAXIMUM TO 0V

33 DRIVE 3000 MAXIMUM TO 0V

34 DRIVE 3000 MAXIMUM TO 0V

35 DRIVE 3000 MAXIMUM TO 0V

36 DRIVE 3000 MAXIMUM TO 0V

37 DRIVE 3000 MAXIMUM TO 0V

38 DRIVE 3000 MAXIMUM TO 0V

39 DRIVE 3000 MAXIMUM TO 0V

40 DRIVE 3000 MAXIMUM TO 0V

41 DRIVE 3000 MAXIMUM TO 0V

42 DRIVE 3000 MAXIMUM TO 0V

43 DRIVE 3000 MAXIMUM TO 0V

44 DRIVE 3000 MAXIMUM TO 0V

45 DRIVE 3000 MAXIMUM TO 0V

46 DRIVE 3000 MAXIMUM TO 0V

47 DRIVE 3000 MAXIMUM TO 0V

48 DRIVE 3000 MAXIMUM TO 0V

49 DRIVE 3000 MAXIMUM TO 0V

50 DRIVE 3000 MAXIMUM TO 0V

51 DRIVE 3000 MAXIMUM TO 0V

52 DRIVE 3000 MAXIMUM TO 0V

53 DRIVE 3000 MAXIMUM TO 0V

54 DRIVE 3000 MAXIMUM TO 0V

55 DRIVE 3000 MAXIMUM TO 0V

56 DRIVE 3000 MAXIMUM TO 0V

57 DRIVE 3000 MAXIMUM TO 0V

58 DRIVE 3000 MAXIMUM TO 0V

59 DRIVE 3000 MAXIMUM TO 0V

60 DRIVE 3000 MAXIMUM TO 0V

61 DRIVE 3000 MAXIMUM TO 0V

62 DRIVE 3000 MAXIMUM TO 0V

63 DRIVE 3000 MAXIMUM TO 0V

64 DRIVE 3000 MAXIMUM TO 0V

65 DRIVE 3000 MAXIMUM TO 0V

66 DRIVE 3000 MAXIMUM TO 0V

67 DRIVE 3000 MAXIMUM TO 0V

68 DRIVE 3000 MAXIMUM TO 0V

69 DRIVE 3000 MAXIMUM TO 0V

70 DRIVE 3000 MAXIMUM TO 0V

71 DRIVE 3000 MAXIMUM TO 0V

72 DRIVE 3000 MAXIMUM TO 0V

73 DRIVE 3000 MAXIMUM TO 0V

74 DRIVE 3000 MAXIMUM TO 0V

75 DRIVE 3000 MAXIMUM TO 0V

76 DRIVE 3000 MAXIMUM TO 0V

77 DRIVE 3000 MAXIMUM TO 0V

78 DRIVE 3000 MAXIMUM TO 0V

79 DRIVE 3000 MAXIMUM TO 0V

80 DRIVE 3000 MAXIMUM TO 0V

81 DRIVE 3000 MAXIMUM TO 0V

82 DRIVE 3000 MAXIMUM TO 0V

83 DRIVE 3000 MAXIMUM TO 0V

84 DRIVE 3000 MAXIMUM TO 0V

85 DRIVE 3000 MAXIMUM TO 0V

86 DRIVE 3000 MAXIMUM TO 0V

87 DRIVE 3000 MAXIMUM TO 0V

88 DRIVE 3000 MAXIMUM TO 0V

89 DRIVE 3000 MAXIMUM TO 0V

90 DRIVE 3000 MAXIMUM TO 0V

91 DRIVE 3000 MAXIMUM TO 0V

92 DRIVE 3000 MAXIMUM TO 0V

93 DRIVE 3000 MAXIMUM TO 0V

94 DRIVE 3000 MAXIMUM TO 0V

95 DRIVE 3000 MAXIMUM TO 0V

96 DRIVE 3000 MAXIMUM TO 0V




97 DRIVE 3000 MAXIMUM TO 0V

98 DRIVE 3000 MAXIMUM TO 0V




99 DRIVE 3000 MAXIMUM TO 0V

100 DRIVE 3000 MAXIMUM TO 0V

81.5 (BUFFERED)

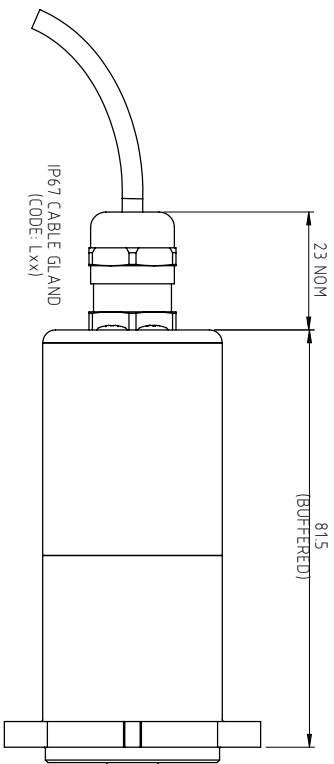

SHAFT FLAT/KEY ALIGNED WITH REFERENCE
MARK IN BASE AT MID TRAVEL ±5°

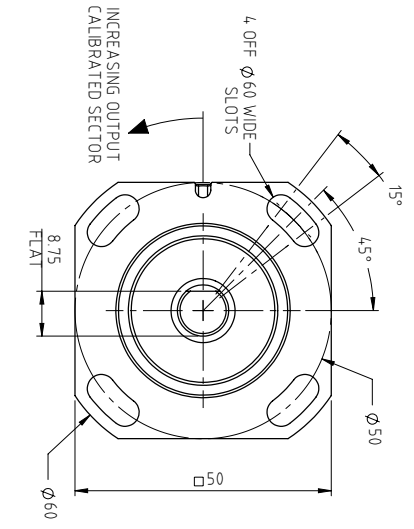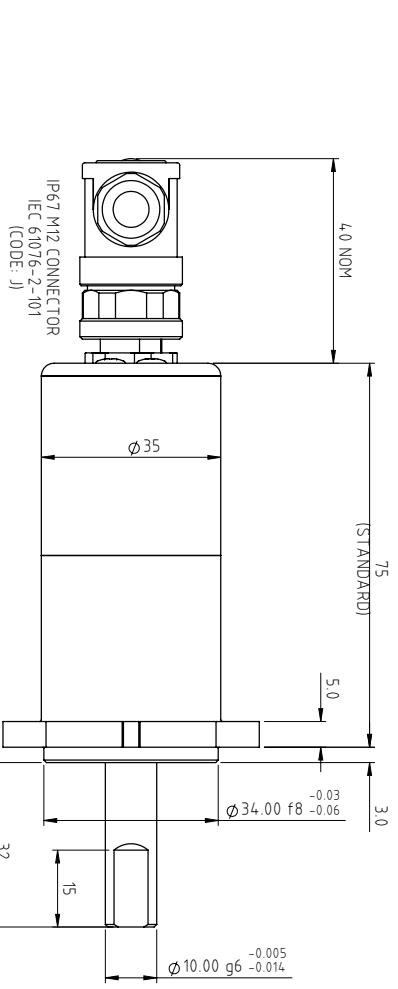

DRAWINGS NOT TO BE CHANGED WITHOUT REFERENCE TO THE CHANGE PROCEDURE.
CHANGES TO PARTS USED IN INHERENTLY SAFE PRODUCTS MUST BE APPROVED BY THE AUTHORIZED PERSON.
THIS IS AN UNCONTROLLED PRINT AND WILL NOT BE UPDATED.

| REV | CHANGE HISTORY | DRWN | DATE | CHK'D |
|-----|----------------|------|------------|-------|
| A | FIRST RELEASE | ASC | 13/01/2022 | ASC |
| | | | | |
| | | | | |
| | | | | |
| | | | | |



| | | | |
|-------------|-----|----|------|
| APPROVED BY | REV | X | 10.4 |
| RDM | A | XX | 10.2 |
| | | XX | 10.1 |
| | | XX | 10.0 |
| | | XX | 9.9 |
| | | XX | 9.8 |
| | | XX | 9.7 |
| | | XX | 9.6 |
| | | XX | 9.5 |
| | | XX | 9.4 |
| | | XX | 9.3 |
| | | XX | 9.2 |
| | | XX | 9.1 |
| | | XX | 9.0 |
| | | XX | 8.9 |
| | | XX | 8.8 |
| | | XX | 8.7 |
| | | XX | 8.6 |
| | | XX | 8.5 |
| | | XX | 8.4 |
| | | XX | 8.3 |
| | | XX | 8.2 |
| | | XX | 8.1 |
| | | XX | 8.0 |
| | | XX | 7.9 |
| | | XX | 7.8 |
| | | XX | 7.7 |
| | | XX | 7.6 |
| | | XX | 7.5 |
| | | XX | 7.4 |
| | | XX | 7.3 |
| | | XX | 7.2 |
| | | XX | 7.1 |
| | | XX | 7.0 |
| | | XX | 6.9 |
| | | XX | 6.8 |
| | | XX | 6.7 |
| | | XX | 6.6 |
| | | XX | 6.5 |
| | | XX | 6.4 |
| | | XX | 6.3 |
| | | XX | 6.2 |
| | | XX | 6.1 |
| | | XX | 6.0 |
| | | XX | 5.9 |
| | | XX | 5.8 |
| | | XX | 5.7 |
| | | XX | 5.6 |
| | | XX | 5.5 |
| | | XX | 5.4 |
| | | XX | 5.3 |
| | | XX | 5.2 |
| | | XX | 5.1 |
| | | XX | 5.0 |
| | | XX | 4.9 |
| | | XX | 4.8 |
| | | XX | 4.7 |
| | | XX | 4.6 |
| | | XX | 4.5 |
| | | XX | 4.4 |
| | | XX | 4.3 |
| | | XX | 4.2 |
| | | XX | 4.1 |
| | | XX | 4.0 |
| | | XX | 3.9 |
| | | XX | 3.8 |
| | | XX | 3.7 |
| | | XX | 3.6 |
| | | XX | 3.5 |
| | | XX | 3.4 |
| | | XX | 3.3 |
| | | XX | 3.2 |
| | | XX | 3.1 |
| | | XX | 3.0 |
| | | XX | 2.9 |
| | | XX | 2.8 |
| | | XX | 2.7 |
| | | XX | 2.6 |
| | | XX | 2.5 |
| | | XX | 2.4 |
| | | XX | 2.3 |
| | | XX | 2.2 |
| | | XX | 2.1 |
| | | XX | 2.0 |
| | | XX | 1.9 |
| | | XX | 1.8 |
| | | XX | 1.7 |
| | | XX | 1.6 |
| | | XX | 1.5 |
| | | XX | 1.4 |
| | | XX | 1.3 |
| | | XX | 1.2 |
| | | XX | 1.1 |
| | | XX | 1.0 |
| | | XX | 0.9 |
| | | XX | 0.8 |
| | | XX | 0.7 |
| | | XX | 0.6 |
| | | XX | 0.5 |
| | | XX | 0.4 |
| | | XX | 0.3 |
| | | XX | 0.2 |
| | | XX | 0.1 |

DESCRIPTION: HIGH SHAFT LOADING ROTARY SENSORS

SCALE: 1:1

DRAWING NUMBER: P510-11

SHEET 1 OF 1



P510 HIGH SHAFT LOADING ROTARY SENSOR

High-resolution angle feedback for industrial and scientific applications

- **Radial Loads of up to 350N and axial loads of up to 250N**
- **Non-contacting inductive technology to eliminate wear**
- **High accuracy and stability**
- **Sealing to IP67**



The P510 Rotary Inductive Position Sensor is an affordable, durable, high-accuracy rotary sensor designed for industrial and scientific feedback applications where the rotating shaft could be subjected to both axial and radial loading.

The P510, like all Positek® sensors, is supplied with the output calibrated to the exact angle required by the customer, between 11 and 160 degrees. The sensor provides a linear output proportional with input shaft rotation, which has full 360 degree rotational freedom.

There is a machined registration mark to identify the calibrated mid point.

It is particularly suitable for OEMs seeking good sensor performance for arduous applications such as industrial machinery where cost is important.

Overall performance, repeatability and stability are outstanding over a wide temperature range.

The P510 has long service life and environmental resistance with a rugged stainless steel body and shaft.

Environmental sealing is to IP67

SPECIFICATION

| | |
|--|--|
| Dimensions | |
| Body diameter | 35 mm |
| Body Length (to seal face) | 75 mm standard, 81.5 mm buffered |
| Mounting Flange | 50 mm square |
| Shaft | 32 mm Ø 10 mm g6 |
| <i>For full mechanical details see drawing P510-11</i> | |
| Independent Linearity | $\leq \pm 0.25\%$ FSO @ 20°C - up to 100° |
| Temperature Coefficients | $< \pm 0.01\%$ /°C Gain & $< \pm 0.01\%$ FS/°C Offset |
| Frequency response | > 10 kHz (-3dB) > 300 Hz (-3dB) 2 wire 4 to 20 mA |
| Resolution | Infinite |
| Noise | $< 0.02\%$ FSO |
| Torque | < 50 mNm Static |
| Environmental Temperature Limits | |
| Operating | -40°C to +125°C standard -20°C to +85°C buffered -40°C to +125°C |
| Storage | IP67 |
| Sealing | IP67 |
| EMC Performance | EN 61000-6-2, EN 61000-6-3 |
| Vibration | IEC 68-2-6: 10 g |
| Shock | IEC 68-2-29: 40 g |
| MTBF | 350,000 hrs 40°C Gf |
| Drawing List | |
| P510-11 | Sensor Outline |
| <i>3D models, step or .igs format, available on request.</i> | |

Do you need a position sensor made to order to suit a particular installation requirement or specification? We'll be happy to modify any of our designs to suit your needs - please contact us with your requirements.

For further information please contact:

PITCH TECHNOLOGIES

Votre contact POSITEK en France | 01 34 85 54 68 | <https://positek.fr> | contact@positek.fr

P510-17a



P510 HIGH SHAFT LOADING ROTARY SENSOR

High-resolution angle feedback for industrial and scientific applications



How Positek's technology eliminates wear for longer life

Positek's Inductive technology is a major advance in displacement sensor design. Our displacement transducers have the simplicity of a potentiometer with the life of an LVDT/RVDT. Our technology combines the best in fundamental inductive principles with advanced micro-electronic integrated circuit technology. A Positek sensor, based on simple inductive coils using Positek's ASIC control technology, directly measures absolute position giving a DC analogue output signal. Because there is no contact between moving electrical components, reliability is high and wear is eliminated for an exceptionally long life. It also overcomes the drawbacks of LVDT technology – bulky coils, poor length-to-stroke ratio and the need for special magnetic materials, no requirement for separate signal conditioning. We also offer a range of ATEX-qualified intrinsically-safe sensors.

| | | | | | | |
|------|--------------|--------|-------------|-------------|--------|--------|
| P510 | a | b | c | d | e | f |
| | Displacement | Output | Adjustments | Connections | Option | Z-code |

| a Displacement | Value | |
|--|--------------------------------------|----------|
| Factory set to any angle from 0-11° (±5.5°) to 0-160° (±80°) (e.g. 0-54 mm) | 54 | |
| b Output | Code | |
| Supply V_{dc} (tolerance) | Output | |
| +5V (4.5 - 5.5V) | 0.5 - 4.5V (ratiometric with supply) | A |
| ±15V nom. (±9 - 28V) | ±5V | B |
| +24V nom. (13 - 28V) | 0.5 - 9.5V | C |
| ±15V nom. (±13.5 - 28V) | ±10V | D |
| +24V nom. (18 - 28V) | 4 - 20mA 2 wire | E |
| +24V nom. (13 - 28V) | 4 - 20mA 3 wire Sink | F |
| +24V nom. (9 - 28V) | 0.5 - 4.5V | G |
| +24V nom. (13 - 28V) | 4 - 20mA 3 wire Source | H |
| c Calibration Adjustments | Code | |
| Accessible default | blank | |
| Sealed | Y | |
| d Connections | Code | |
| Connector IP67 4 pin M12 IEC 61076-2-101, nylon | J | |
| Connector IP67 4 pin M12 IEC 61076-2-101, nylon pre-wired | Jxx | |
| Cable gland IP67 Pg9 metal | Lxx | |
| Cable gland, short† IP67, metal | Mxx | |
| <small>Specify required cable length 'xx' in cm. e.g. L2000 specifies axial cable gland with 20 m of cable, 50 cm supplied as standard. †Nb: restricted cable pull strength.</small> | | |
| e Shaft | Code | |
| with Flat | N | |
| with Key | P | |

| f Z-code (optional) | Code |
|---|-------------|
| ±± 0.1% Independent Linearity FSO @20°C 0 - 100° max. | Z650 |



For further information please contact:

PITCH TECHNOLOGIES

Votre contact POSITEK en France | 01 34 85 54 68 | <https://positek.fr> | contact@positek.fr


P510-17a

Installation Information

P510 HIGH SHAFT LOADING ROTARY SENSOR


| Output Option | Output Description: | Supply Voltage: V_s (tolerance) | Load resistance: (include leads for 4 to 20mA O/Ps) |
|---------------|--------------------------------------|--------------------------------------|---|
| A | 0.5 - 4.5V (ratiometric with supply) | +5V (4.5 - 5.5V) | $\geq 5k\Omega$ |
| B | $\pm 5V$ | $\pm 15V$ nom. ($\pm 9 - 28V$) | $\geq 5k\Omega$ |
| C | 0.5 - 9.5V | +24V nom. (13 - 28V) | $\geq 5k\Omega$ |
| D | $\pm 10V$ | $\pm 15V$ nom. ($\pm 13.5 - 28V$) | $\geq 5k\Omega$ |
| E | 4 - 20mA 2 wire Current Loop | +24V nom. (18 - 28V) | $\approx 0 - 300\Omega$ max. @24V ~ 1.2 to 6V across 300 Ω $\{R_L \text{ max.} = (V_s - 18) / 20^{-3}\}$ |
| F | 4 - 20mA 3 wire Sink | +24V nom. (13 - 28V) | $\approx 0 - 950\Omega$ max. @24V ~ 3.8 to 19V across 950 Ω $\{R_L \text{ max.} = (V_s - 5) / 20^{-3}\}$ |
| G | 0.5 - 4.5V | +24V nom. (9 - 28V) | $\geq 5k\Omega$ |
| H | 4 - 20mA 3 wire Source | +24V nom. (13 - 28V) | $\approx 0 - 300\Omega$ max. ~ 1.2 to 6V across 300 Ω |

Not all output options available - see product datasheet for full options list

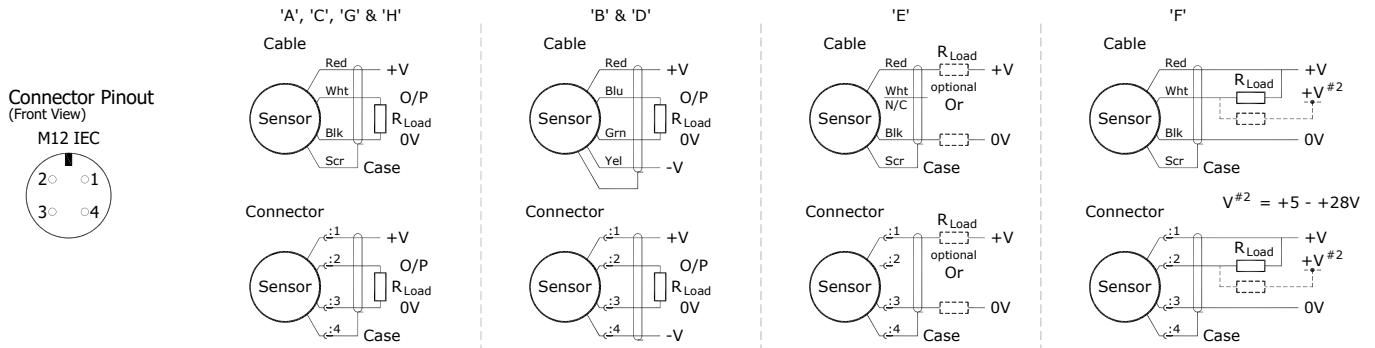


Gain and Offset Adjustment: (Where accessible - Typically $\pm 10\%$ Min available)

To adjust the gain or offset use a small potentiometer adjuster or screwdriver 2mm across. Do not apply too much force on the potentiometers. The offset is set at mid span at the mid point, within $\pm 5^\circ$, of rotation.



Mechanical Mounting: Flange mounted - see drawing P510-11. The maximum axial shaft loading of 250N and radial loading of 350N. Tests indicate that life in excess of 80 million cycles can be achieved at maximum side and end loading.

Output Characteristic: The sensor has full rotational freedom and two sectors, 180° apart, over which linear response can be achieved. At the mid point of the calibrated range the output signal will be half full scale deflection, and the flat / key on the shaft is aligned with the registration mark in the flange. In the calibrated range the output increases as the shaft is rotated in an anti-clockwise direction viewed from the shaft. The calibrated output is factory set to be between 11 and 160°.



Warning The M12 IEC connector may be rotated for purposes of convenient orientation of the connector and cable, however rotating the connector more than one complete revolution is not recommended. **Repeated rotation of the connector will damage the internal wiring!**

Incorrect Connection Protection levels:-

- A** **Not protected** – the sensor is **not** protected against either reverse polarity or over-voltage. The risk of damage should be minimal where the supply current is limited to less than 50mA.
- B & D** Supply leads diode protected. Output must not be taken outside $\pm 12V$.
- C & G** Supply leads diode protected. Output must not be taken outside 0 to 12V.
- E, F & H** Protected against any misconnection within the rated voltage.

For further information please contact:

PITCH TECHNOLOGIES

Votre contact POSITEK en France | 01 34 85 54 68 | <https://positek.fr> | contact@positek.fr

P510-19a